


coaxial valve

type MK 10



2/2 way valve direct acting
pressure range PN 0-40 bar
orifice DN 10 mm
connection thread
function valve normally closed symbol **NC**
 valve normally open symbol **NO**



△ Above stated body materials refer to the valve port connections that get in contact with the media only!

design pressure balanced, with spring return
body materials ① brass ②
 ③ brass, nickel plated ⑤
 ④ ⑥ stainless steel
valve seat synthetic resin on metal
seal materials NBR FPM, CR, EPDM

details needed

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

| | general specifications | options |
|-----------------------------|---|------------------------------|
| ports | MK threads G 1/4 - G 3/4 | special threads |
| function | NC | NO |
| pressure range | bar 0-16/0-40 | |
| Kv value | m ³ /h 2,5 | |
| vacuum | leak rate < 10 ⁻⁶ mbar·l·s ⁻¹ | |
| pressure-vacuum | P ₁ ⇔ P ₂ upon request | |
| back pressure | P ₂ > P ₁ available (max. 16 bar) | |
| media | gaseous - liquid - contaminated | |
| abrasive media | | |
| damping | opening closing | |
| flow direction | A ⇔ B as marked | bi-directional (max. 16 bar) |
| switching cycles | 1/min 200 | |
| switching time | ms opening 25 closing 25 | |
| media temperature | °C DC: -10 to +100 | -30 to +120 |
| ambient temperature | °C AC: -10 to +100 | -30 to +120 |
| limit switches | DC: -10 to +80 | |
| manual override | AC: -10 to +80 | inductive |
| approvals | | LR/GL/WAZ |
| mounting | | mounting brackets |
| weight | kg MK 1,5 | |
| additional equipment | | upon request |

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.


⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

| | electrical specifications | options |
|------------------------------|--|------------------------------|
| nominal voltage | U _n 24 V DC | special voltage upon request |
| actuation | U _n 230 V 40-60 Hz AC | special voltage upon request |
| | DC direct-current magnet | |
| | AC direct-current magnet with integrated rectifier | |
| insulation rating | H 180°C | |
| protection | IP65 | |
| energized duty rating | ED 100% | |
| connection | plug acc. DIN EN 175301-803 form A, 4 positions x 90° / wire diameter 6-8 mm | terminal box M16x1,5 |
| optional | M12x1 connector acc. DESINA | connector acc. VDMA |
| additional equipment | illuminated plug with varistor | |
| current consumption | N-coil 24 V DC 1,00 A | |
| | 230 V 40-60 Hz AC 0,13 A | |
| | H-coil 24 V DC 1,29 A | |
| | 230 V 40-60 Hz AC 0,16 A | |
| explosion proof | | |
| limit switches | inductive (I) normally open-PNP | |
| | inductive (B) normally open-PNP | |

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

type MK 10

function: **NC**
closed when not energized

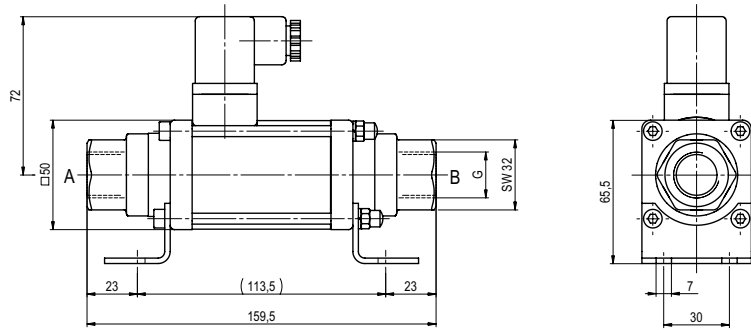

type MK 10

function: **NO**
open when not energized

